




GR-Analog(+IO-Link)

GR - External Aluminum Housing -type sensor

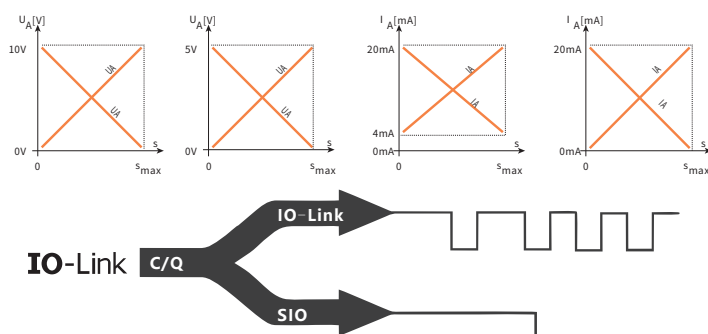

- + Easy to install: push-pull rod type, quick installation
- + Linear measurement, absolute value output without zeroing
- + Easy to use, standard singal output, maintenance -free
- + High resolution: resolution up to $1\mu m$
- + Widely used: printing, papermaking, rubber and plastic machinery and other fields
- + Output Analog+IO-Link




Document Number:
GR-AIO (V1.2)-EN

TECHNICAL PARAMETER


Input	
Measured data	Position
Measurement range	50mm...1500mm
Output	
Voltage	0...10VDC, 10...0VDC, 0...5VDC, 5...0VDC (Controller min. load impedance >5K Ω)+IO-Link
Current	4...20mA, 20...4mA, 0...20mA, 20...0mA (min./max. load 0/750 Ω)+IO-Link
Transmission rate (IO-Link)	Rate(bit/s)
	Port
	4800
	38400
	230400
	COM1
	COM2
	COM3*
Resolution	
Position resolution	Analog
	IO-Link
	16 bit D/A(internal resolution 1 μ m)
	1/2/5*/10/20/50/100 μ m
None-Linearity	< $\pm 0.02\%$ F.S. (min. $\pm 50\mu$ m)
Repeatability	< $\pm 0.005\%$ F.S. (min. $\pm 20\mu$ m)
Update time	Stroke length
	Update time
	≤ 1200 mm
	0.5ms
	≤ 1500 mm
	1ms
Temperature coefficient	< 30ppm/ $^{\circ}$ C
Mounting	
Mounting position	Any
Installation type	M6 ball bearings, Removable fixing card
Design/Material	
Sensor shell	Aluminum alloy
Push-pull rods	Aluminum alloy
Electrical connection	
Wiring connection	Straight out cable or aviation plug
Operating voltage	+24VDC (-15/+20%)
Polarity protection	Up to -36VDC
Overvoltage protection	Up to +36VDC
Power consumption	< 70mA (varies with range size)
Insulation strength	500 VDC (DC ground to machine ground)
Operating conditions	
Magnet movement speed	≤ 5 m/s
Operating temperature	-40...85 $^{\circ}$ C
Humidity	90 % relative humidity, no condensation
Ingress protection	IP65
Shock	100 g (single shock) IEC standard 60068-2-27
Vibration	5g/10...2000 Hz, IEC standard 60068-2-6 (resonant frequencies excluded)
EMC	Electromagnetic emission according to EN 61000-6-3
	Electromagnetic immunity according to EN 61000-6-2

Note: “*” as default


Radial outlet, 8 pin M12 connector

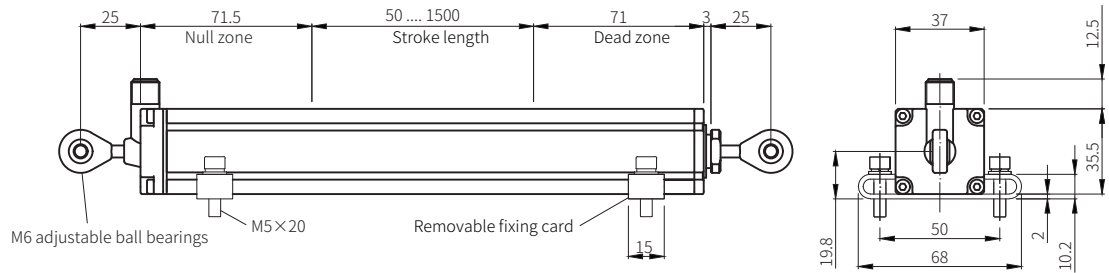


Radial outlet, Straight out cable

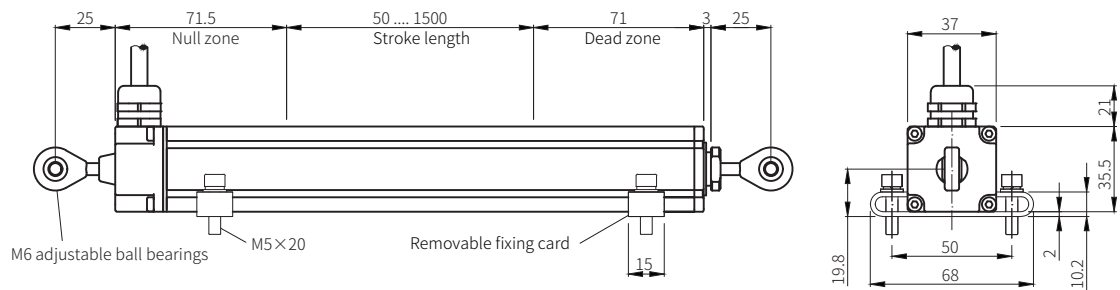



Axial outlet, 8 pin M12 connector


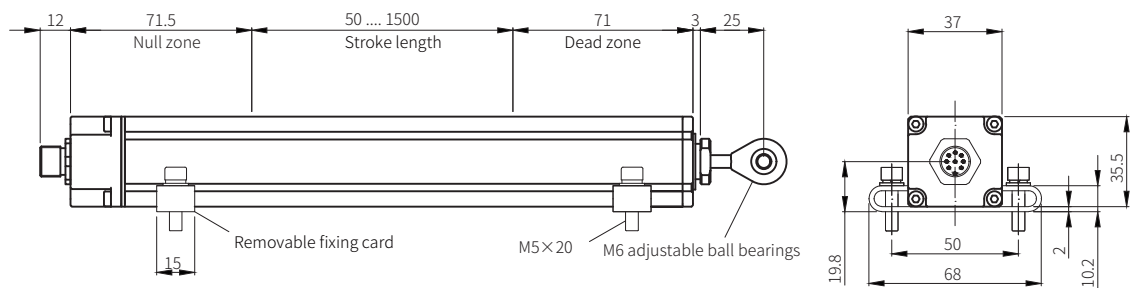


Axial outlet, Straight out cable

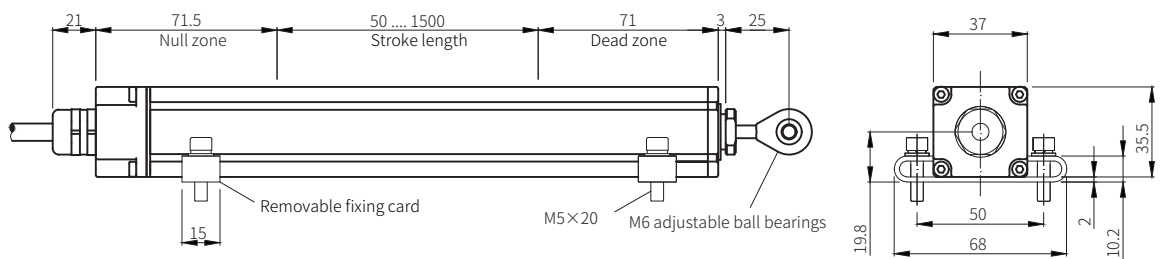

Wiring

5 pin M12 connector			PIN	Function
			1	SGND 2*
			2	SGND 1
			3	Signal output 2*
			4	C/Q(communication line)
			5	Signal output 1
			6	GND
			7	+24VDC(-15/+20%)
			8	NC

Side outgoing cable	Straight out cable	Color	Function
		Brown	+24VDC(-15/+20%)
		White	GND
		Yellow	SGND 1
		Red	C/Q(communication line)
		Green	Signal output 1
		Gray	Signal output 2 *
		Pink	SGND 2 *

"*"adaptable for dual output signal connection

ORDER CODE

GR - - - - M- - - -				Output (Output Code)
Outgoing direction	Stroke length	Connection type		
R Radial	0050...1500mm	RP/T_ _	Straight out _ _m high performance /high temperature cable	
A Axial	(5mm increments)	D812	8 pin M12 connector	

(If the cable length is less than two digits, add zeros in front.)

Analog Output Code		[1][2][3]-[4] [5][6]		
[1] System	[2] Resolution	[3] Output	[4][5] Current/Voltage	[6] Magnet
L +IO-Link (COM3)	1 5μm*	1 Position	A0 4...20mA (forward) V0 0...10V (forward)	1 one magnet
	2 2μm	2 Position and speed*	A1 20...4mA (reverse) V1 10...0V (reverse)	
	3 10μm	(Speed : μm/s)	A2 0...20mA (forward) V2 0...5V (forward)	
	4 50μm		A3 20...0mA (reverse) V3 5...0V (reverse)	
	5 100μm			
	7 20μm			
	8 1μm			

Note: Forward, data grows larger when the magnet is distant from the electronics housing;



Reverse, data grows larger when the magnet approaches the electronics housing.

Model selection	Model: GR-R-0600M-D812-L11-A01
	Explanation: GR type , Radial outlet, stroke length 600mm, 8pin M12 aviation plug, Interface Analog+IO-Link, IO-Link resolution 5μm, position measurement, analog output of 4..20mA (forward), single magnet.





ACCESSORIES

Analog(+IO-Link)



Name	Removable fixing card	M6 fish eyeball head bearing
Order code	11-1009	11-1007



名称	8 孔 M12 母接头	8 孔 M12 母接头 (90 度直角)
端面图		
外壳材料		
适配线径	8~10mm	6~8mm
终端	螺纹连接	
订购代码	18-5004 (母)	18-5005 (母)

■ For more customizable products,
please contact us.

Building 6, Dazhu Enterprise Bay,
8th yard of Liangshuihe 2nd street, BDA Beijing P.R.China
Tel: +86 10-67948976 67948916
Fax: +86 10-67948979

Beijing Tebeifu Electronic Technology Co., Ltd.